



## SENSORS: Magnet switch

### Magnet switch

- Cost-effective
- Reliable
- Simple installation

### Technical specifications


Protection class: IP 67

Nominal Voltage: 48V / Nominal Current: 0,5 A

Operating Temperature: -40 ... +85 °C

Material: PA6 & GF30

### Zeichnung von Magnetschalter

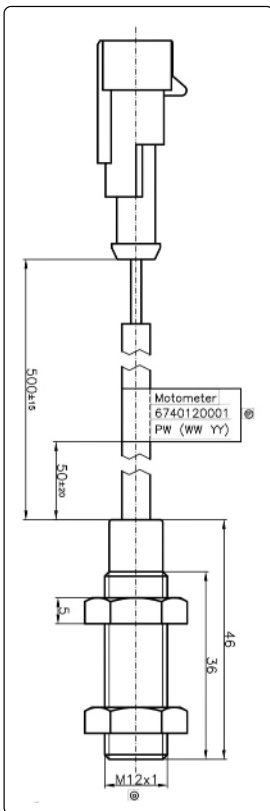

### Special wishes? We deliver customized solutions!

In addition to the standard temperature sensors listed, we can also offer you customized specific solutions. Simply contact us with your requirements via the adjacent button:

[Contact us now](#)

Thread	Thread Length	Connector	Nominal Power	Feature	Part No
M12x1	36mm	AMP Superseal 2 pol.	20 W	N/O	<a href="#">P74 012 0001</a>
M12x1	36mm	AMP 02P Econoseal	20 W	Opener	<a href="#">P74 012 0002</a>
M12x1	36mm	AMP Superseal 2 pol.	10 W	N/O	<a href="#">P74 012 0004</a>

# MOTOMETER

### MOTOMETER GmbH

Fritz-Neuert-Straße 27 | 75181 Pforzheim/Germany

Phone +49 7231 42909-300 | Fax +49 7231 42909-305

E-Mail [info@motometer.de](mailto:info@motometer.de) | [www.motometer.de](http://www.motometer.de)